


For Global Market

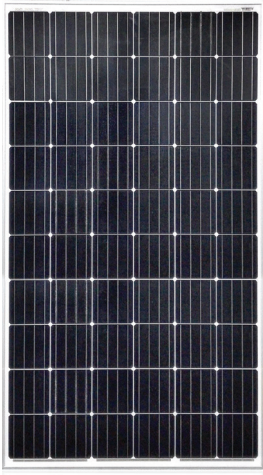

# NOVA<sup>TM</sup> Crystalline PV Module

## Baseline CHSM6610M Series Baseline CHSM6610M/HV Series

CHSM6610M max system voltage 1000V standard, CHSM6610M/HV max system voltage 1500V standard

270    275    280    285    290

EN

### ELECTRICAL SPECIFICATIONS

	270 Wp	275 Wp	280 Wp	285 Wp	290 Wp
STC rated output (P <sub>mpp</sub> )*	270 Wp	275 Wp	280 Wp	285 Wp	290 Wp
PTC rated output (P <sub>mpp</sub> )**	247.9 Wp	252.6 Wp	257.3 Wp	262.0 Wp	266.8 Wp
Standard sorted output	0/+5 Wp				
Warranted power output STC (P <sub>nominal</sub> )	270 Wp	275 Wp	280 Wp	285 Wp	290 Wp
Rated voltage (V <sub>mpp</sub> ) at STC	30.70 V	31.10 V	31.48 V	31.80 V	32.15 V
Rated current (I <sub>mpp</sub> ) at STC	8.80 A	8.84 A	8.91 A	8.97 A	9.03 A
Open circuit voltage (V <sub>oc</sub> ) at STC	38.12 V	38.36 V	38.83 V	39.15 V	39.45 V
Short circuit current (I <sub>sc</sub> ) at STC	9.29 A	9.38 A	9.41 A	9.46 A	9.54 A
Module efficiency	16.5%	16.9%	17.2%	17.5%	17.8%
Rated output (P <sub>mpp</sub> ) at NOCT	198.4 Wp	202.1 Wp	205.8 Wp	209.4 Wp	213.1 Wp
Rated voltage (V <sub>mpp</sub> ) at NOCT	28.26 V	28.64 V	28.95 V	29.27 V	29.58 V
Rated current (I <sub>mpp</sub> ) at NOCT	7.02 A	7.06 A	7.11 A	7.16 A	7.20 A
Open circuit voltage (V <sub>oc</sub> ) at NOCT	35.36 V	35.58 V	36.02 V	36.32 V	36.60 V
Short circuit current (I <sub>sc</sub> ) at NOCT	7.47 A	7.54 A	7.57 A	7.61 A	7.67 A
Temperature coefficient (P <sub>mpp</sub> )	- 0.380%/K				
Temperature coefficient (I <sub>sc</sub> )	+0.042%/K				
Temperature coefficient (I <sub>mpp</sub> )	- 0.008%/K				
Temperature coefficient (V <sub>mpp</sub> )	- 0.373%/K				
Temperature coefficient (V <sub>oc</sub> )	- 0.284%/K				
Normal operating cell temperature (NOCT)	46±2°C				
Maximum system voltage (IEC/UL)	1000V <sub>DC</sub> / 1000V <sub>DC</sub> or 1500V <sub>DC</sub> / 1500V <sub>DC</sub>				
Number of diodes	6 (or 3)				
Maximum series fuse rating	15 A				

\* Measurement tolerance    +/- 3%

\*\* Estimated



A CHINT COMPANY

ASTRONERGY

## RELATED PARAMETERS

Cell type	Monocrystalline
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	6"
Packing unit	28 modules
Weight of packing unit (for container)	557 kg / 1228 lbs

## MECHANICAL SPECIFICATIONS


Outer dimensions (L x W x H)	1648 x 990 x 35 mm 64.88 x 38.98 x 1.38 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	18.3 kg / 40.34 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65 (above)
<sup>①</sup> Cable length(UL/IEC)	900(+)/600(-)mm / 35.43/23.62 in
Cable diameter (UL/IEC)	12 AWG / 4 mm <sup>2</sup>
<sup>②</sup> Maximum load capacity	2400 Pa
Fire performance (UL/IEC)	Type 1 (UL) or Class C (IEC)
Connector type (UL/IEC)	MC4 compatible

<sup>①</sup> Option: 1000 mm for defined projects in advance.

<sup>②</sup> Refer to Astronergy crystalline installation manual.

## QUALIFICATION AND LINEAR WARRANTIES

Product standard	IEC 61215, 61730 / UL 1703
Extended product warranty	10 years
Output decline 3%/year performance P <sub>mpp</sub> (STC)	1 <sup>st</sup> year
Output decline 0.7%/year performance P <sub>mpp</sub> (STC)	2 <sup>nd</sup> ~ 25 <sup>th</sup> years

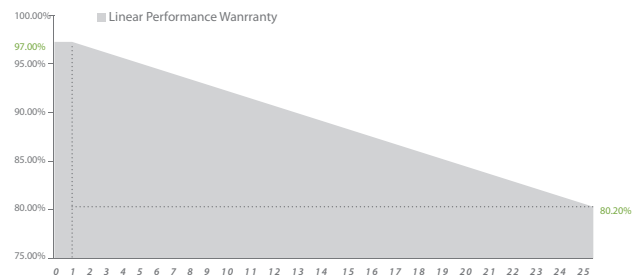

## ARTICLE NUMBER

Model	Article No. (IEC)	Article No. (UL)
(NOVA) CHSM6610M-270	100515	100533
(NOVA) CHSM6610M-275	100516	100534
(NOVA) CHSM6610M-280	100517	100535
(NOVA) CHSM6610M-285	100518	100536
(NOVA) CHSM6610M-290	100530	100537
(NOVA) CHSM6610M/HV-270	900077	900090
(NOVA) CHSM6610M/HV-275	900078	900091
(NOVA) CHSM6610M/HV-280	900079	900092
(NOVA) CHSM6610M/HV-285	900080	900093
(NOVA) CHSM6610M/HV-290	900087	900094

## MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation. Specifications and designs included in this datasheet are subject to change without notice.

