

Preliminary

Mono Multi Solutions



BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-DE09.08

PRODUCT RANGE: 390-405W

405W+


MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.1%

MAXIMUM EFFICIENCY

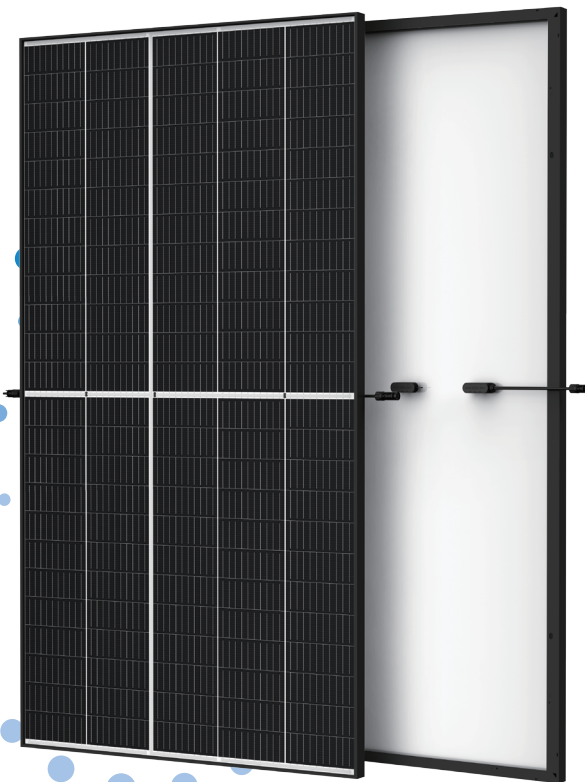

### Small in size, big on power

- Small form factor. Generate a huge amount of energy even in limited space. Up to 405W, 21.1% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with lower temperature coefficient (-0.34%) and operating temperature


### Universal solution for residential and C&I rooftops

- Designed for compatibility with existing mainstream optimizers, inverters and mounting systems
- Perfect size and low weight. Easy for handling. Economy for transporting
- Diverse installation solutions. Flexible for system deployment

### High Reliability

- 15 year product warranty
- 25 year performance warranty with lowest degradation;
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load

### Trina Solar's Backsheet Performance Warranty

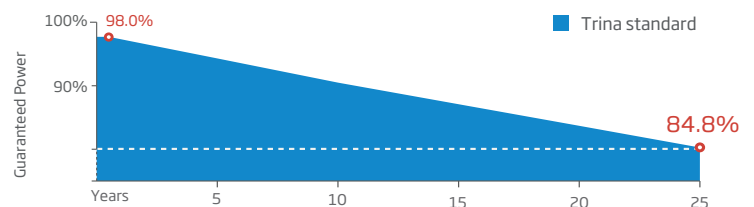


### Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




**DIMENSIONS OF PV MODULE(mm)**

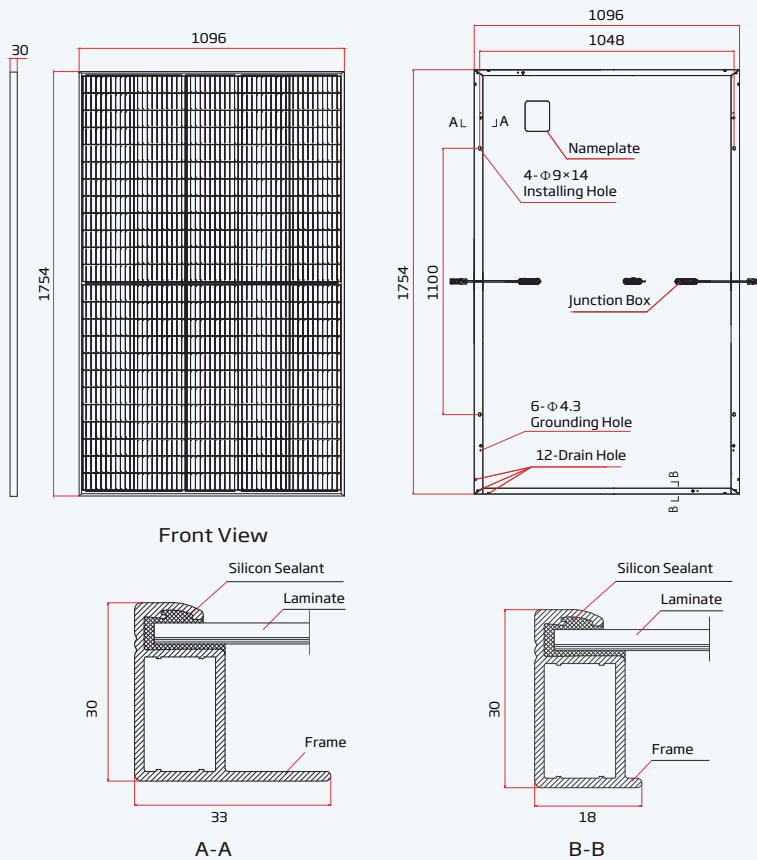

**I-V CURVES OF PV MODULE(395 W)**

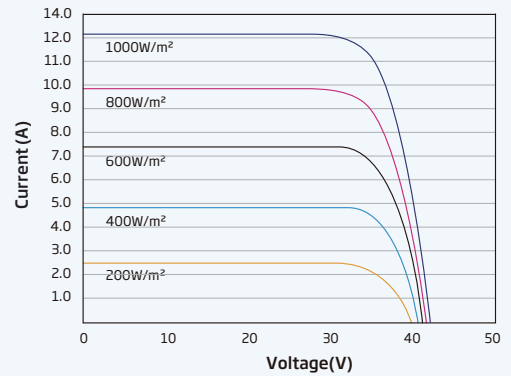

**P-V CURVES OF PV MODULE(395W)**

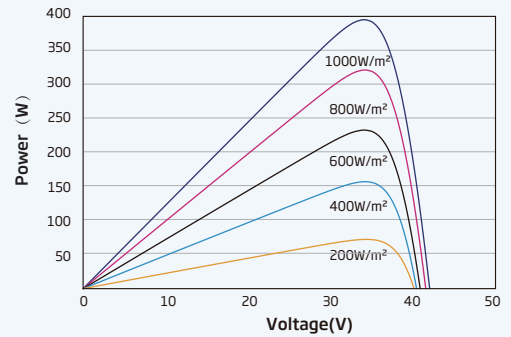

**ELECTRICAL DATA (STC)**

Peak Power Watts- $P_{MAX}$ (Wp)*	390	395	400	405
Power Tolerance- $P_{MAX}$ (W)	0 ~ +5			
Maximum Power Voltage- $V_{MPP}$ (V)	33.8	34.0	34.2	34.4
Maximum Power Current- $I_{MPP}$ (A)	11.54	11.62	11.70	11.77
Open Circuit Voltage- $V_{OC}$ (V)	40.8	41.0	41.2	41.4
Short Circuit Current- $I_{SC}$ (A)	12.14	12.21	12.28	12.34
Module Efficiency $\eta_m$ (%)	20.3	20.5	20.8	21.1

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance:  $\pm 3\%$ .

**ELECTRICAL DATA (NOCT)**

Maximum Power- $P_{MAX}$ (Wp)	295	298	302	306
Maximum Power Voltage- $V_{MPP}$ (V)	31.8	32.0	32.2	32.5
Maximum Power Current- $I_{MPP}$ (A)	9.26	9.32	9.38	9.41
Open Circuit Voltage- $V_{OC}$ (V)	38.4	38.6	38.8	38.9
Short Circuit Current- $I_{SC}$ (A)	9.78	9.84	9.90	9.95

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	1754×1096×30 mm (69.06×43.15×1.18 inches)
Weight	21.0 kg (46.3 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 1100/1100 mm(43.31/43.31 inches)
Connector	MC4 EV02 / TS4*

\*Please refer to regional datasheet for specified connector.

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C ( $\pm 2^\circ\text{C}$ )
Temperature Coefficient of $P_{MAX}$	-0.34%/°C
Temperature Coefficient of $V_{OC}$	-0.25%/°C
Temperature Coefficient of $I_{SC}$	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

**WARRANTY**

15 year Product Workmanship Warranty  
 25 year Power Warranty  
 2% first year degradation  
 0.55% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 36 pieces  
 Modules per 40' container: 936 pieces